

Commercial Solutions Division

3M™ Scotchlite™ Reflective Graphic Film

Series 680

3M™ Scotchlite™ Reflective Graphic Film

IJ680-10

3M™ Scotchlite™ Removable Reflective Graphic Film with Comply™ Adhesive

Series 680CR

3M™ Scotchlite™ Removable Reflective Graphic Film with Comply™ Adhesive

Series 680CR E

3M™ Scotchlite™ Removable Reflective Graphic Film with Comply™ Adhesive

IJ680CR-10 E

3M™ Scotchlite™ Removable Reflective Graphic Film with Comply™ Adhesive

IJ680CR-10

Product Description

3M™ Scotchlite™ Reflective Graphic Film Series 680, IJ680-10, 3M™ Scotchlite™ Removable Reflective Graphic Film with Comply™ Adhesive Series 680CR E, 680CR-10 and 3M™ Scotchlite™ Removable Reflective Graphic Film 680R-10 E are designed for commercial vehicle, railroad and bus graphics, sign graphics, and striping on vertical, flat, curved or corrugated surfaces, with or without rivets.

Unprocessed film resists fuel vapors or occasional spills.

This film uses 3M™ Controltac™ and 3M™ Comply™ technology.

3M™ Controltac™ minimizes the initial contact area of the adhesive and allows the applicator to reposition the film during application.

This allows easier installation of large format graphics in a wide temperature range.

Product variants with Comply™ adhesive also have air release channels for fast and easy, bubble-free graphic installations.

| | | | |
|-----------------|-----------------|----------|--|
| Product Line | Screen printing | 680-X | X = color code, retro-reflective, semi-matte, permanent adhesive (clear and silver underneath). |
| | | 680CR-X | X = color code, retro-reflective, semi-matte, removable adhesive (clear and silver underneath) with Comply™. |
| | | 680CR-XE | X = color code, retro-reflective, semi-matte, removable adhesive (clear and silver underneath) with Comply™. |
| Inkjet printing | IJ680-10 | | white, retro-reflective, semi-matte, permanent adhesive (clear and silver underneath). |
| | IJ680CR-10 | | white, retro-reflective, semi-matte, removable adhesive (clear and silver underneath) with Comply™. |
| | IJ680CR-XE | | X = color code, retro-reflective, semi-matte, removable adhesive (clear and silver underneath) with Comply™. |

Product Characteristics

These are indicative values for unprocessed products.
Contact your 3M representative for a custom specification.

| | | | | |
|------------------------|--|---|---|--|
| Physical & Application | Material | cast vinyl | | |
| | Surface finish | semi-matte | | |
| | Thickness (film) | 180 µm (0.180 mm) | | |
| | Adhesive type | pressure-sensitive | | |
| | Adhesive appearance | clear | | |
| | Liner | double-sided Polyethylene coated paper | | |
| | Adhesion | 22 N/25 mm | FTM 1: 180° peel, substrate: glass; cond: 24 h 23°C/50%RH | |
| | Application method | dry only! | | |
| | Applied shrinkage | 0.4 mm | FTM 14 | |
| | Application temperature (minimum air and substrate) | +13°C | for flat surfaces | |
| | | +13°C | for curved to corrugated surfaces with and without rivets | |
| | | versions with Comply: | +7°C | |
| | Notice! | flat surfaces without rivets require a minimum application temperature of +10°C, versions with Comply applied on flat surfaces without rivets require a minimum application temperature of +4°C | | |
| | Service temperature (after application) | -34°C to +93°C (not for extended periods of time at the extremes) | | |
| | Surface type | flat to curved, incl. rivets and corrugations | | |
| Substrate type | aluminum, paint | | | |
| | Notice! | Two-part polyurethane paints and clear coats may stop curing when the air and surface temperatures are lower than +24°C. Be aware that outgassing causes this sheeting to bubble. | | |
| Graphic removal | Hard to remove from supported substrates. Statement given for removable versions only! No liability is given for ease or speed of removal of any graphic. Pay attention to adequate air and substrate temperature. | | | |
| Notice! | Versions with Comply: Fair to remove with heat and/or chemicals from supported substrates. | | | |

The values above are the results of illustrative lab test measurements and shall not be considered as a commitment from 3M.

| | | |
|---------|--------------------|--|
| Storage | Shelf life | Use within two years from the date of manufacture on the sealed original box. Use within one year after opening the box. |
| | Storage conditions | +4°C to +40°C, out of sunlight, original container in clean and dry area. The shelf life as defined above remains an indicative and maximum data, subject to many external and non-controllable factors. It may never be interpreted as warranty. |

Flammability Flammability standards are different from country to country. Ask your local 3M contact for details, please.

Durability

The durabilities mentioned in the table below are the results of illustrative lab tests. The values show the best performance expected from these products, provided that the film will be processed and applied professionally according to 3M's recommendations.

The durability statements do not constitute warranties of quality, life and characteristics.

The durability of products is also influenced by:

- the type of substrate and thorough preparation of the surface (with 3M™ Surface Preparation System)
- application procedures
- environmental factors
- the method and the frequency of cleaning

Unprocessed film The following durability data are given for unprocessed film only!

Climatic zones Graphic durability is largely determined by the climate and the angle of exposure. Find below a table showing the durability of a product according to the angle of exposure and the geographical location of the application.


Zone 1 Northern Europe, Italy (north of Rome), Russia

Zone 2 Mediterranean area without North Africa, South Africa

Zone 3 Gulf area, Africa

Exposure types

Vertical:



The face of the graphic is $\pm 10^\circ$ from vertical.

Interior: Interior means an application inside a building without direct exposure to sunlight.

| Vertical outdoor exposure | Zone 1 | Zone 2 | Zone 3 |
|----------------------------------|---------------|---------------|---------------|
| white/black | 8 years | 7 years | 5 years |
| colors | 8 years | 7 years | 5 years |
| Interior application | Zone 1 | Zone 2 | Zone 3 |
| interior | 8 years | 8 years | 8 years |

3M™ Performance Guarantee and MCS™ Warranty

In addition, 3M provides a guarantee/warranty on a finished applied graphic within the framework of 3M™ Performance Guarantee and/or 3M™ MCS™ warranty programs.

For detailed graphic construction and application options along with specific Warranty periods, please see the Warranty matrices and Warranty information on 3M Graphic Solutions/Warranties.

Visit www.3mgraphics.com for getting more details about 3M's comprehensive graphic solutions.

Limitations of End Uses

3M specifically does not recommend or warrant the following uses, but please contact us to discuss your needs to recommend other products.

Graphics applied to

- application to competitive flexible sign substrates.
- flexible substrates incl. 3M™ Panagraphics™ III Wide Width Flexible Substrate.
- low surface energy substrates or substrates with low surface energy coating.
- other than flat or moderate curved/corrugated surfaces.
- painted or unpainted rough wallboards, gypsum boards and wallpapers.
- stainless steel.
- substrates other than recommended.
- surfaces that are not clean and smooth.
- surfaces with poor paint to substrate adhesion.

Graphic removal from

- signs or existing graphics that must remain intact.

Important Notice

- 3M Commercial Solutions products are not tested against automotive manufacturer specifications!
- Graphics with more than two layers of film except as described in this bulletin are not recommended.

- using fluorescent film where black light fluorescent is needed.

Special Information

The typical value of retroreflection is dependent on the film color. It is measured at a 5° entrance angle and a 0.33° observation angle and expressed in candelas per lux per square meter [cd/(lx·m²)].

The entrance angle is formed by a light beam striking the surface at a point and at a line that is perpendicular to the surface at the same point. Unprinted film 680, 680CR, 680CR E has the following typical value of retroreflection.

| film number | color name | typical coefficient Class E |
|---------------------|--------------|-----------------------------|
| IJ680-10 | White | 40 |
| film number | color name | typical coefficient Class E |
| IJ680CR-10 | White | 40 |
| film number | color name | typical coefficient Class E |
| 680, 680CR, 680CR E | | |
| -10 | White | 40 |
| -14 | Orange | 25 |
| -64 | Gold | 50 |
| -71 | Yellow | 30 |
| -72 | Red | 25 |
| -75 | Blue | 10 |
| -76 | Light Blue | 10 |
| -77 | Green | 20 |
| -81 | Lemon Yellow | 35 |
| -82 | Ruby Red | 15 |
| -85 | Black | 35 |

According to UN/ECE104 film series 680, 680CR, 680CR E is approved Class E. 680-10 White and 680-81 Lemon Yellow are approved Class D/E.

Graphics Manufacturing

Graphic protection can improve the appearance, performance and durability of printed graphics. Any printed graphic exposed to abrasive conditions (including vehicles), harsh cleaners or chemicals must include graphic protection in order to be warranted.

When to use an overprint clear or overlaminate

See instruction bulletin GPO 'graphic protection options' for further information about selection and use of protective overlaminates and printable clears.

[> Product Bulletin Graphic Protection Options <](#)

Shipping finished graphics

Flat, or rolled film side out on 130 mm (5 inch) or larger core. These methods help to prevent the liner from wrinkling or application tape, if used, from popping off.

Matching

Whenever two or more pieces of the same translucent graphic film are seamed together as a continuous band of colored graphic film, they should be matched to assure uniform daytime and night appearance.


Material from a single roll or lot must be used on a single graphic or sign for identical matching.

In general, translucent graphic film from a roll must be matched as shown in FIGURE 1. The dark line represents one edge of the film.

The matching edges are always swung to meet each other. Panels 1 and 2 are a matched set. Pieces 1, 2 and 3 are matched, etc. By following this method you can match as many sheets from a roll as are required for any size sign.

Exact match between different run numbers should not be assumed.

FIGURE 1

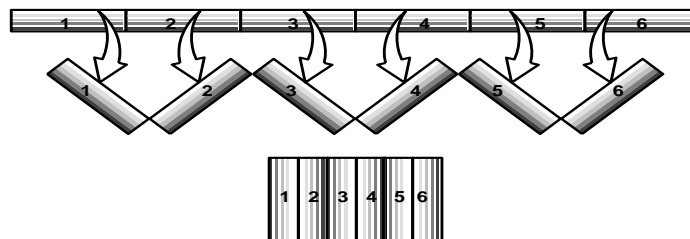

Converting Information

Based upon cutting evaluations the minimum height for text is 25 mm using upper and lowercase Helvetica Medium. The stroke width should not be lower than 1 mm.

Electronic Cutting

The variable characteristics of electronically controlled cutting equipment require users to verify their specific requirements.

| | |
|-----------------------------------|--|
| Sharpness of knife blade | Dull blades impart a serrated look to the edge of the cut film. |
| Weight of knife blade | The ideal weight slightly scores the liner. Too little weight does not cut completely through the film and the adhesive. Excessive weight cuts the liner and causes the blade to drag, accelerating wear and creating a serrated cut edge on the film. |
| Weeding | The excess film should be weed (removed) as soon after cutting as practical. This is to minimize the effect of possible adhesive flow. |
| Temperature and relative humidity | Temperature and relative humidity are minor considerations, but avoid extreme or rapid fluctuating conditions. |
| Roll storage | Store the film in the same environment as the cutting equipment. |
| Further information | For more details refer to our instruction bulletin 4.1 'Sheeting, Scoring, Film Cutting', please. >Instruction Bulletin 4.1'Sheeting, Scoring, Film cutting'< |

Converting Information

Inkjet Printing

Adequately Dry Graphics

A too high total physical ink amount on the film results in media characteristic changes, inadequate drying, overlamine lifting, and/or poor graphic performance. The maximum recommended total ink coverage for this film is 270%.

Inadequate drying can result in graphic failure including curling, increased shrinkage and adhesion failure, which are not covered under any 3M warranty.

Poorly dried film becomes soft and stretchy, and the adhesive becomes too aggressive.

Even if your printer has a dryer, it may not adequately dry latex and solvent inks in the short period of time it spends passing through the heater.

Recommendations to improve the drying of solvent inks Dry the graphic unrolled or at least as a loose wound roll standing upright. To further increase air circulation place the spooled film roll on a grid, and place a fan beneath the grid.

If you only spool open the film, adequate drying could still take a week, depending on the environment.

Build enough time into your process to ensure adequate drying of the graphic. 3M recommends at least a minimum drying time of 24 hrs before further processing. Test: Fold a piece of film with maximum ink laydown of the graphic onto itself. Apply 140 g/cm² for 15 minutes, release and check for effects like sticking or dull spots. These are clear indications that further curing or drying is needed.

Notice: Latex inks are different Unlike solvent inks, spooling and letting latex printed graphics sit does not help to cure the ink, but does allow the graphic manufacturer to see if any oily spots are generated which may interfere with proper adhesion of overlaminates.

To ensure proper latex ink drying, use the following recommendations:

Media Presets: HP media presets contain all the needed settings to print on a specific media.

Download and use media presets from the following page: www.hp.com/go/mediasolutionslocator.

Environmental Conditions: HP media presets have been specially designed and tested for each printer-media combination. Recommended environmental conditions: +20°C to +25°C, Humidity 40% - 60% RH

Important notice for HP 831/871 and HP 881/891 The amount of ink printed is the main key for proper overlamine adhesion. Select a media preset using 100% or less ink density.

Post-processing of latex printed graphics immediately after printing Latex inks should emerge from the printer fully dried. Post-air drying of a wet print will not enable drying, since latex ink drying requires that the dried ink is heated above the film formation temperature of the latex inside the printer.

For immediately post-processing of latex printed graphics follow strictly the recommendations given above (Section: Latex inks are different) and test the proper drying with the following performance tests:

Visual Test: Check the image immediately after printing. The sample should not be wet or sticky to the touch, or have an 'oily' feel when it emerges from the printer.

Rubbing Test: After the visual inspection, wipe the printed sample with a white wet paper towel. Fully-dried ink should resist wiping and should not show any stains on the white cloth. If the ink is easily removed by wet rubbing, then it is not dried.

Stacking Test: In some cases, the top surface will appear dry after printing but within a few minutes ink may migrate to the surface leaving an oily aspect. To ensure proper drying, stack at least 12 sheets liner to printed side and let sit for one hour.

After 1 hour, remove the stack and check for "oily" stains, wet surfaces or glossiness changes on high ink laydown areas on each sheet. If any of these occur, then the ink is not properly dried.

If a sample is not properly dried on the printer, reprint the image under a condition that allows complete drying. Common improvement steps are:

- Increasing the drying temperature in 5 degree steps.
- Increasing the number of passes to slow down printing.
- Reducing the amount of ink printed (media preset with lower ink densities).

Allow the converted graphic to build sufficient bond prior to application/installation

Give laminated samples time before applying them. The adhesion bond between the laminate and the printed base film will increase with time. 24 hours minimum for room temperature laminated graphics.

8 hours minimum for graphics laminated with heated rolls (one or two). Lamination temperature: +40°C to +60°C. Lamination speed: maximum 2 meter/minute.

Converting Information

Formulations and processing conditions can affect ink durability. Refer to the 3M Product and Instruction Bulletins for your ink for limitations and proper usage. Graphic protection can improve the appearance, performance and durability of your graphic.

Screen Printing

A clear coat also prevents chalking on unprinted films. Use equipment designed to handle high viscosity materials and make sure the coating is evenly applied to the specifications given in the clear's Instruction Bulletin.

Abrasion and Loss of Gloss

Abrasion damage and loss of gloss are not covered by any 3M warranty. This is considered normal wear and tear.

Application

See product bulletin ATR 'application tape recommendations' for information about selection and use of suitable application tapes for this product, please.

[> Product Bulletin Application Tape Recommendations <](#)

Refer to Instruction Bulletin 5.1 'select and prepare substrates for graphic application', for general application information.

[>Instruction Bulletin 5.1 'select and prepare substrates for graphic application'<](#)

Important Notice Controltac™ Films

Films require high squeegee pressure to avoid air entrapment between film and substrate. Therefore the use of 3M™ PA-1 Gold Squeegee with thin and soft sleeve is recommended. Wetting of sleeves helps to avoid scratches on film surface during application. Please refer to the product's instruction bulletin for detailed information.

Maintenance and Cleaning

Use a cleaner designed for high-quality painted surfaces. The cleaner must be wet, non-abrasive, without strong solvents, and have a pH value between 3 and 11 (neither strongly acidic nor strongly alkaline).

Refer to Instruction Bulletin 6.5 'storage, handling, maintenance and removal of films and sheetings', for general maintenance and cleaning information.

[>Instruction Bulletin 6.5 'Storage, Handling, Maintenance and Removal of Films and Sheetings'<](#)

Remarks

This bulletin provides technical information only.

Important notice

All questions of warranty and liability relating to this product are governed by the terms and conditions of the sale, subject, where applicable, to the prevailing law.

Before using, the user must determine the suitability of the product for its required or intended use, and the user assumes all risk and liability whatsoever in connection therewith.

As outdoor graphics age, natural weathering occurs causing a gradual reduction in gloss, slight color changes, some lifting of the graphic at the edges or around rivets, and ultimately a minor amount of cracking.

These changes are not evidence of product failure and are not covered by a 3M warranty.

Additional information

Visit the web site of your local subsidiary at www.3Mgraphics.com for getting:

- more details about 3M™ MCS™ Warranty and 3M™ Performance Guarantee
- additional instruction bulletins
- a complete product overview about materials 3M is offering

Responsible for this technical bulletin

3M, Controltac, Envision, Scotchcal, Comply, MCS, and Panagraphics are trademarks of 3M Company. All other trademarks are the property of their respective owners.



Commercial Solutions Division
Hermeslaan 7
1831 Diegem, Belgium

3M Deutschland GmbH
Carl-Schurz-Str. 1
41453 Neuss, Germany

The use of trademark signs and brand names in this bulletin is based upon US standards. These standards may vary from country to country outside the USA.